



ENTECH SIGNS - ALPHA LED
1-800-383-8163
WWW.ALPHA-LED.COM

EBTZ-42425-8ERR/DACY-8/USB




SPECIFICATIONS


TYPE: -----	DIGITAL and 15 CHARACTER ALPHANUMERIC in (Red, Green, Yellow or Blue)
DISPLAY: -----	4-DIGIT, 7 seg. TIME in (Red, Green or Blue) and 5 x 7 DOT- MATRIX
CHARACTER HEIGHT: -----	2.5" (63.5mm) HR / MIN 1.2" (30.48mm) 15 Character location display
VISIBILITY: -----	85 Ft. (25.90 METERS)
POWER REQUIREMENTS: --	100-240V 1.5A 47~63 Hz (12vdc SWITCHING POWER SUPPLY).
FRAME: -----	ALUMINUM (BLACK ANODIZED FINISH OR SILVER)
DIMENSIONS: -----	12.25" x 64.25" x 1.38" and 12.25" x 64.25" x 1.38"
WEIGHT: -----	12.2lb each
OPERATING TEMP.: -----	-17° TO 190° F
HUMIDITY: -----	0% TO 95% NON-CONDENSING
OPERATING MODE: -----	12 or 24 HR SELECTABLE and AUTOMATIC DAY LIGHTS.

ALL CLOCKS USE THE DALLAS DS32 SERIES RTC PARTS, AND OUR FIRMWARE CONTROL, TO GET THE ONE SEC A YEAR ACCURACY.



NEW 1 SEC A YEAR ACCURATE (TCXO) STANDARD

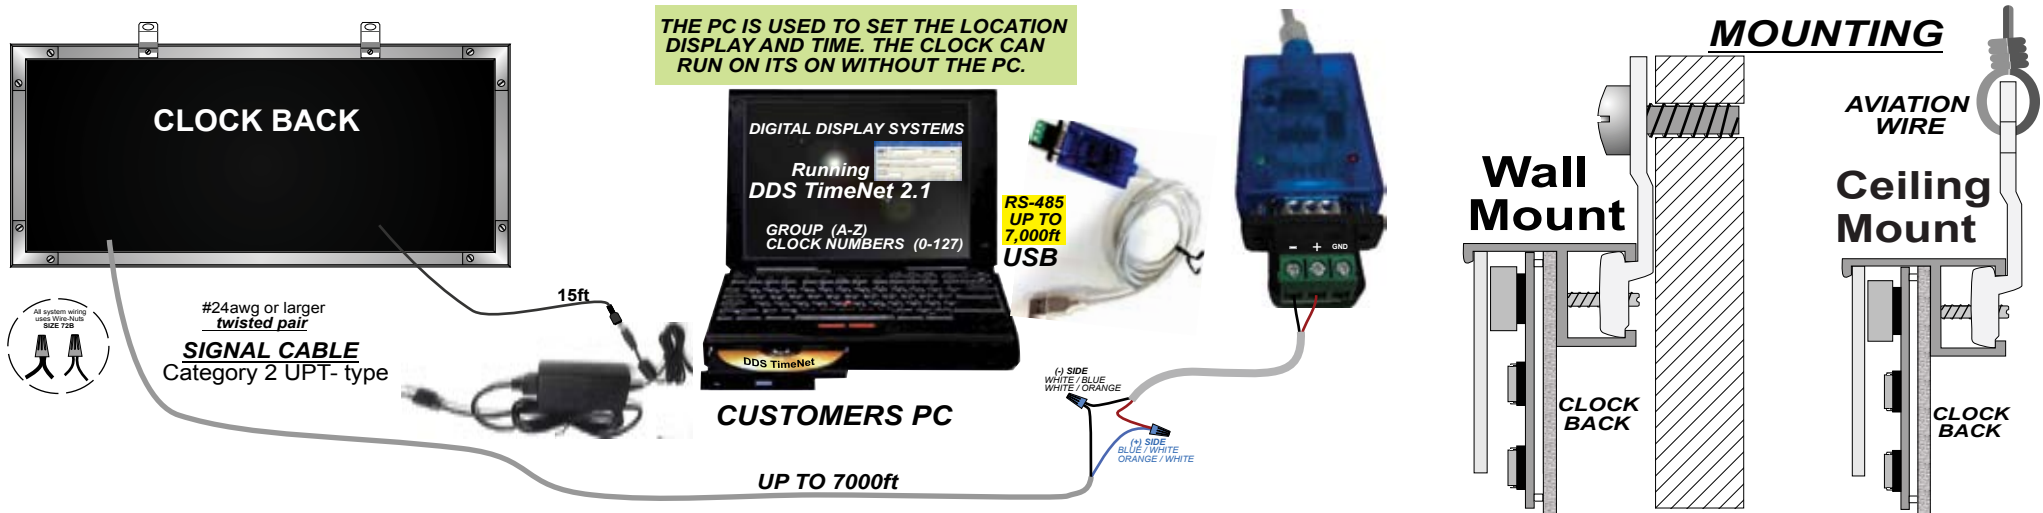


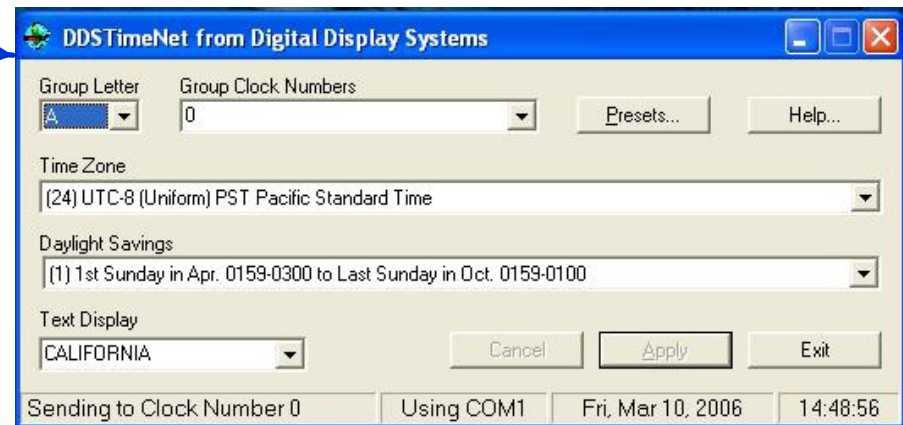

**RS-485
UP TO
7,000ft
USB**

WHEN ON THE PC THE PC TIME IS UPDATING THE CLOCKS, WHEN OFF THE PC THE TCXO IS UPDATING THE CLOCKS. THE LEFT MOST CLOCKS COLONS ARE STEADY, ON THE PC AND FLASHING WHEN ON THE TCXO.





GROUP CLOCK NUMBERS

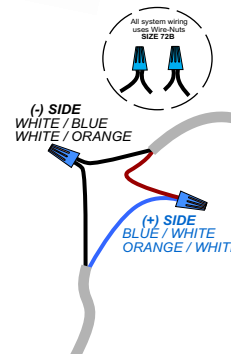

128.50"

HOW TO CHANGE THE COM PORT TO MATCH THE USB PORT

**GO TO THE DEVICE MANAGER
TO FIND THE USB COM PORT**

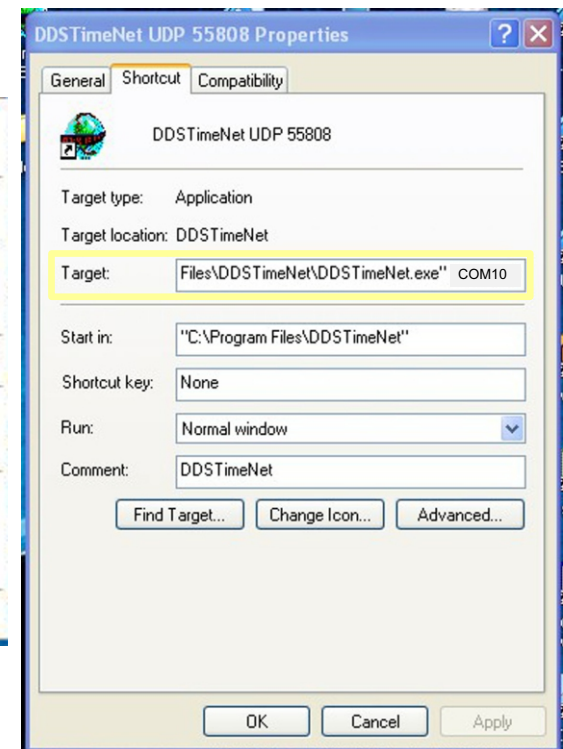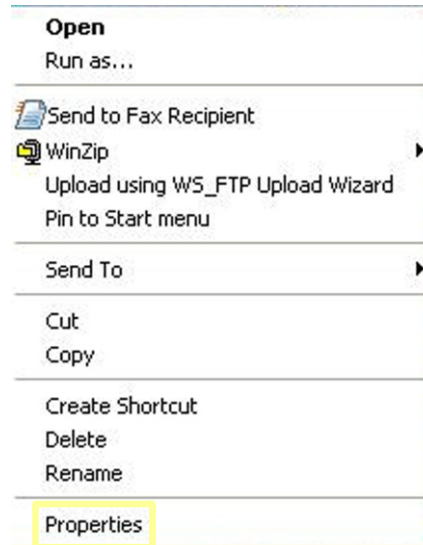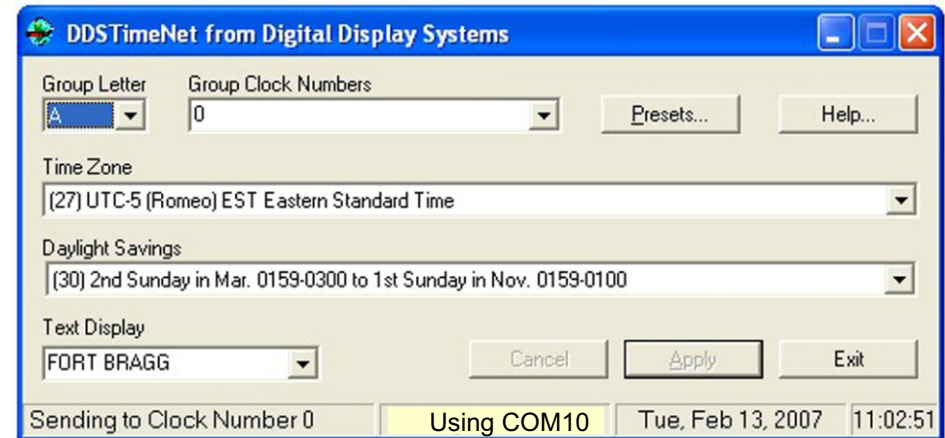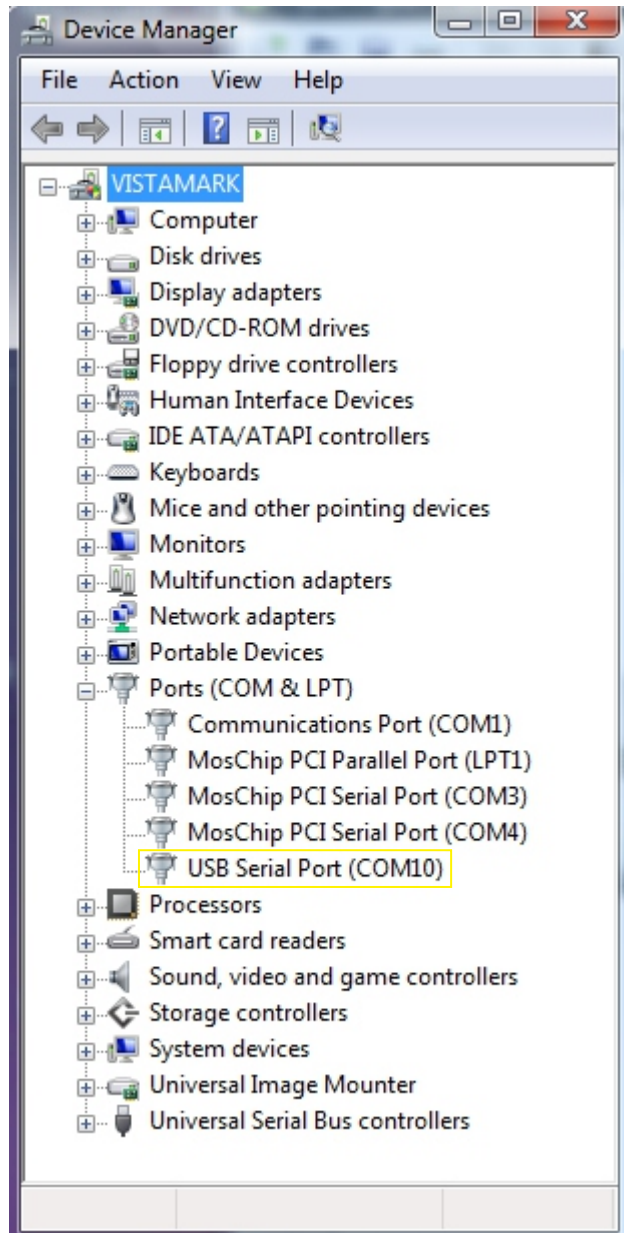

**Create a shortcut for the DDS TimeNet,
right click on the shortcut then click on
Properties. Add at the end of the Target
line a "space com10" then click ok.**